


AD01285

### Applications

- High-Speed Communications
- Optical Communications

### Board Features

- 1 or 2 ARINC 801 Connectors




### Summary

The **FMC-RCP-4G** is an FMC I/O module with up to four 4Gb/s Optical transceiver channels.

Based on the FMC Standard (VITA 57.1) but with modified profile and increased front IO area to accommodate the optical transceivers.

Suitable for use in harsh environments with LuxCis optical connectors and full speed operation over the industrial temperature range.

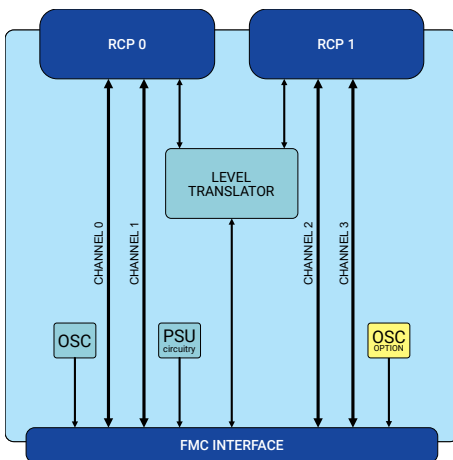

### Deliverables

FMC-RCP-4G Board  
One Year Warranty  
One Year Technical Support

### Board Format

VITA 57.1 FPGA Mezzanine Card (FMC)

### Input/Output Interfaces

#### High-speed Serial IO

4 Optical Links - 850nm (4 Tx & 4 Rx)

### Environmental Specification

Cooling Option	Operating Temperatures		Storage Temperatures	
	Min	Max	Min	Max
AC1	-40°C	+70°C	-55°C	+100°C
CC1	-40°C	+70°C	-55°C	+100°C

### Operating Humidity

Up to 95% (non-condensing)

### EMC Standards

FCC 47CFR Part 2  
EN55022:2010 Equipment ClassB

### Ordering Information

**Order Code: FMC-RCP-4G/(f0)(c)(a)**

Option	Code	Description of Options
Lanes	l	2 = 2 Tx + 2 Rx Lanes (one RCP Module), 4 = 4 Tx + 4 Rx Lanes (two RCP Module)
Referency Frequency	f0	blank = 156.250MHz, /xxx.yyy (specify frequency in MHz)
Cooling	c	blank = air cooled industrial, /CC1 = conduction cooled industrial
Conformal Coating	a	blank = none, A = Acrylic, P = Polyurethane

### UK Office

Address: Suite L4A, 160 Dundee Street,  
Edinburgh, EH11 1DQ, UK  
Telephone: +44 131 558 2600  
Fax: +44 131 558 2700  
email: sales@alpha-data.com

### USA Office

10822 West Toller Drive, Suite 250  
Littleton, CO 80127  
(303) 954 8768  
(866) 820 9956 - toll free  
sales@alpha-data.com