

AD01429



Applications

- High performance data capture and processing
- CPU offload acceleration
- Low latency networking and analytics
- AI Inference for Data Center or Edge applications
- High Performance Computing
- Industrial vision and control
- Lab-based system prototyping
- Rack level deployments

Board Features

- VITA57.4 FMC+ Interface
- GigE Interface
- 1x Firefly™ (x4) Interface
- System Monitor
- Heatsink with optional fan

Summary


The ADM-PA100 is an adaptable PCIe form factor AMD Versal™ ACAP Data Processing Unit suitable for early development and rapid deployment of solutions based on AMD Versal ACAP VC1902 AI Core device.

The PCIe form factor is suitable for desktop, lab, rack mount and data center deployments in commercial temperature ranges. Additionally, the board can optionally be deployed stand-alone without any reliance on a host CPU. The FMC+ interface on the board allows off-chip support of the many standard and custom interfaces that can be supported by the Versal ACAP through the very wide range of Alpha Data and 3rd Party FMC+ IO adapters available.

Flexible reference designs, allowing customers to access the full IO flexibility of the chip are provided for both the Vivado and Vitis tool chains.

The powerful VC1902 ACAP AI Core device provides a flexible device featuring 400 AI Engine VLIW processor cores capable of 133 INT8 TOPs for Machine Learning or DSP applications, with support for scalar processing on on-chip 2 ARM® Cortex™ A72 Application class CPU cores and 2 ARM Cortex R5 real-time CPU core. These processors are complemented by a large area of 7nm Programmable Logic containing 900k LUTs, almost 2000 DSP tiles and 164Mb of very high bandwidth SRAM suitable for attaching extremely high performance and high efficiency offload acceleration to the ARM and AIE array processors.

The device provides, and the board allows, access to a large number of configurable IO pins and Gigabit Transceiver ports which can connect to built-in hard-IP cores for 100G Multi-rate Ethernet, PCIe and DDR4, or can be controlled by custom IO logic in the programmable fabric supporting an incredibly wide range of communication standards and applications.

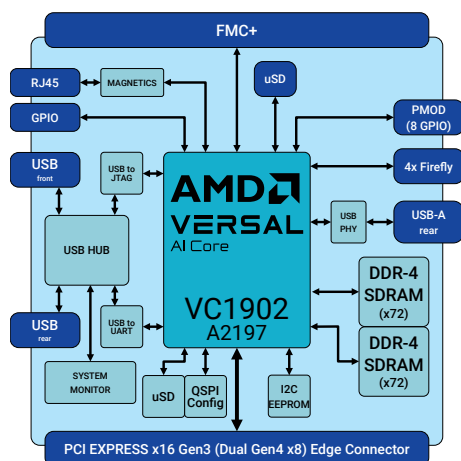

Target Device

AMD Versal ACAP
VC1902-2MS (A2197)

Host Interface

PCI Express Gen3 x16 (or Dual Gen4 x8)

FPGA Specification

LUTs = 899.8k
DSPs = 1968
BRAM = 34Mb
URAM = 130Mb
AIEs = 400
400x AI Engines
2x ARM Cortex-A72 MPCores™
2x ARM Cortex-R5 MPCores

Application Data Memory

2x 1G x 72 (8GiB) DDR4-3200 DDR4-SDRAM

Configuration Memory

x8 QSPI 2Gb storage

Configuration Modes

From onboard Flash or uSD Card
Through USB board management (built-in JTAG)
MCAP Interface for Staged Configuration and Dynamic Function eXchange

Communications Interfaces

1x Firefly 4x28Gbps - 10/25/40/100G Ethernet, PCIe, Fiber Channel, Infiniband, Aurora

Input/Output Interfaces

FMC+ Interface (FMC+)
24 High-Speed differential Serial Links (up to 28Gbps) and 80 diff pairs (or 160 single ended) GPIO

Other Interfaces

Gigabit Ethernet Interface (RJ45)
USB-A for Application use
Dual USB Configuration Sockets (front and back)
GPIO Interface (8 GPIO)
PMOD Interface (8 GPIO)

Support

ARM PS Targeted Reference Design, for host free development.
 PCIe based hardware reference designs for Vivado™ with compatible
 Windows and Linux driver and host API
 Vitis® Board Platform and reference design for ARM PS and AIE
 development.

Deliverables

ADM-PA100 Board
 One Year Warranty
 One Year Technical Support

Board Format

PCIe 3/4 Length, full height, Dual Slot, includes front panel
 WxHxD = 267.2mm x 126.3mm x 39.9mm
 Weight = PCB assembly - 210g; with fans heatsink and covers - 1150g

Environmental Specification

Cooling Option	Operating Temperatures		Storage Temperatures	
	Min	Max	Min	Max
Active	0°C	+55°C	-40°C	+85°C
Passive	0°C	+55°C	-40°C	+85°C

Operating Humidity : Up to 95% (non-condensing)

Order Code: ADM-PA100(s)(f)

FPGA Configuration	s	/2MS = VC1902-2MS
Fan Fitted	f	BLANK = active (cooling fans) /NF = passive (no fans)
Note	Other options available. Please contact factory for details.	